


REPLACING BATTERY

1. EXPIRY DATE OF BUILT-IN BATTERY

Expiry date of the built-in battery is 1 year after replaced. On and after the 20th of the month of the expiry date, the following message appears when the EDX-2000A is started up.

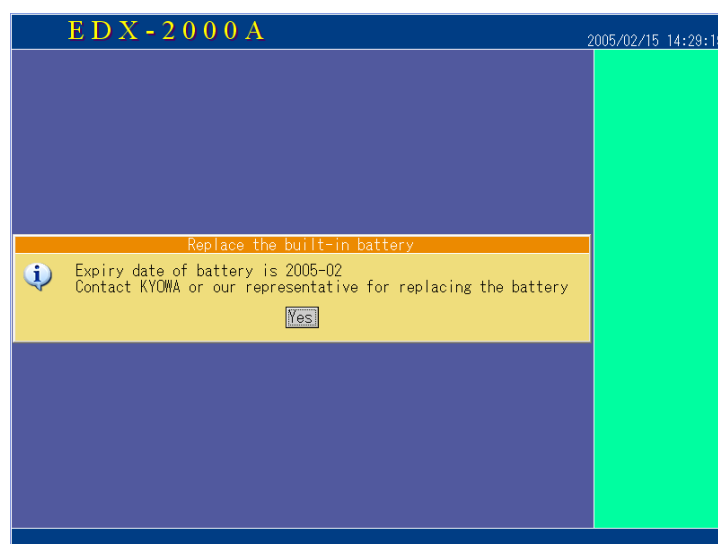

When the above message is displayed, contact KYOWA or our representative for replacing the battery. After receiving the new battery, see “7-2 REPLACING BUILT-IN BATTERY (NiCd BATTERY)” in EDX-2000A Hardware Instruction Manual and replace the battery with the new one.

NOTE

Even after the above message is shown, the EDX-2000A can be operated as usual.

However, since the EDX-2000A is not capable of responding to a temporary blackout, it is required to replace the battery as soon as possible.

The indication of the expiry data is valid on and after the EDX-2000A software Version 0.1 0.5.

2. INITIALIZING EXPIRY DATE OF THE BUILT-IN BATTERY

After replacing the built-in battery with a new one, initialize the expiry data of the battery with the following procedures.


- 1) Select <Environment> on the main menu and then, select <Time> from the <Environment> main menu.
- 2) Input '1000' to the year and month of the expiry year.

For the expiry date, set 1 year after the month of the replacement.

Example) If the built-in battery is replaced in February 2005, set the expiry date to February 2006.

At this time, you do not have to set the time in details; date, minute, and second.

- 3) After entering the expiry month and year, press the **ENTER** key. Then, the following message appears.
Press the **ENTER** key once again.

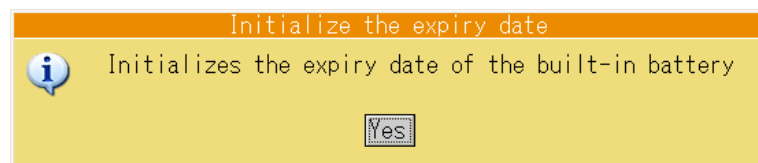

- 4) The expiry date of the built-in battery is indicated on the upper right of the <Environment> setting screen. Confirm the expiry date. If it is not correct, conduct the operations from item 1) and reset the expiry date once again.

