

LMB-A

Small-sized Compression Load Cell

CE

1
-82

Sensor



Compact, lightweight, affordable
Ideal for load distribution measurement

● **Rated capacity: 10 N to 2 kN**

Ultra-small and lightweight load cells. It can be used by adhering it, fitting it into a recess.

Specifications

Performance

Rated Capacity	See table below.
Nonlinearity	Within $\pm 0.5\%$ RO
Hysteresis	Within $\pm 0.5\%$ RO
Repeatability	0.3% RO or less
Rated Output	1.4 mV/V or more (10N: 0.5 mV/V or more)

Environmental Characteristics

Safe Temperature	-10 to 80°C (Non-condensing)
Compensated Temperature	0 to 70°C (Non-condensing)
Temperature Effect on Zero	Within $\pm 0.05\%$ RO/°C (10N: Within $\pm 0.2\%$ RO/°C) (50N: Within $\pm 0.1\%$ RO/°C)
Temperature Effect on Output	Within $\pm 0.05\%$ °C (10N: Within $\pm 0.1\%$ °C)

Electrical Characteristics

Safe Excitation	7 V AC or DC
Recommended Excitation	1 to 5 V AC or DC
Input Resistance	350 Ω $\pm 2.5\%$
Output Resistance	350 Ω $\pm 2.5\%$
Cable	4-conductor (0.035 mm ²) vinyl shielded cable, 1.7 mm diameter by 2 m long, bared at the tip (Shield wire is not connected to the case.)

Mechanical Properties

Safe Overloads	150%
Natural Frequencies	See table below.
Spring Constant	See table below.
Material	Stainless steel
Weight	10 to 200N: Approx. 1.5 g (Excluding cable) 500N to 2KN: Approx. 6 g (Excluding cable)
Degree of Protection	IP64 (JIS C 0920/IEC 60529)
Compliance	Directive 2011/65/EU, (EU)/2015/863 (10 restricted substances) (RoHS)


■ **Optional Accessories** Mount base CFM-B

Models


Model	Rated Capacity	Natural Frequencies (Approx.)	Spring Constant (Approx.)
LMB-A-10N	10 N	32 kHz	1.5 kN/mm
LMB-A-50N	50 N	40 kHz	2.4 kN/mm
LMB-A-100N	100 N	47 kHz	4.5 kN/mm
LMB-A-200N	200 N	59 kHz	8.8 kN/mm
LMB-A-500N	500 N	37 kHz	16 kN/mm
LMB-A-1KN	1 kN	45 kHz	26 kN/mm
LMB-A-2KN	2 kN	54 kHz	41 kN/mm

*TEDS-installed models are available. Please contact us.

Dimensions

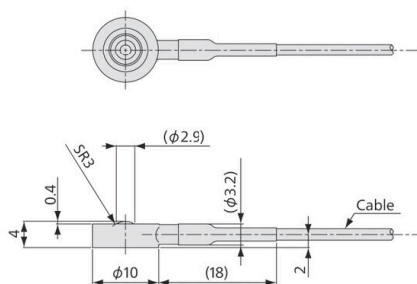


LMB-A-10 to 200N

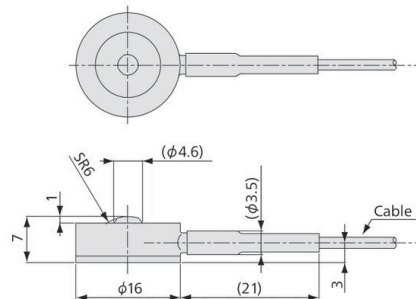

LMB-A-500N to 2KN

Bared at the tip (standard)



Strain Gage

Load Cell

Pressure
Sensor

Acceleration
Sensor

Torque
Sensor

Displacement
Sensor

Component
Force
Sensor

Automotive
Sensor

Civil
Engineering
Sensor